




Since 1991

WIRING DIAGRAM

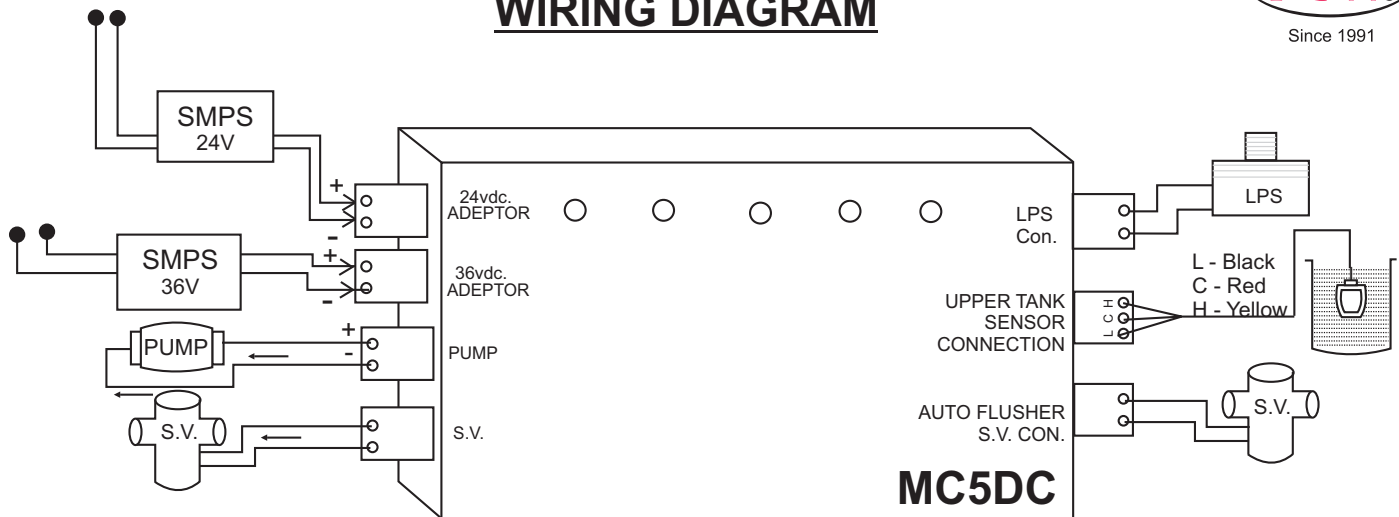

FEATURES

1. Prefix Ideal Setting.
2. 5 Function Status Indication.
3. Auto Restart Procedure.
4. Suitable for **25 Ltr. R.O.** System.

Note - 1) Whenever pressure is not maintain, system will be off, after 30min.system will be started.

2) For Upper tank use our Magnetic sensor OR Floaty.

SPECIFICATION

- MODEL - MC5DC
- Input Voltage - 24/36V DC(DUAL OPTION)
- Pump Voltage - 24/36V DC (As per I/P)
- Current Capacity - Up to 5 AMP.(Max.)
- Sensor Voltage - 12 VDC
- Auto Flusher - 24V/36V DC (As per I/P)
- Flusher time - 30-35 Seconds
- Solenoid Valve - 24V/36 DC (As per I/P)
- LPS Active after 30 - 60 Sec.
- Gross Weight - 0.140 Kg.
- Dimension - 135 x 60 x 38mm. (LWH)
- Application for R.O. System